

N-180 & N-280


ENG

N-180

230 Volt, 50/60 Hz, 640 Watt, IP 24

230 Volt, 50/60 Hz, 640 Watt, IP 24, double insulation protection class II, over load protection switch with integrated low voltage release. 5 m cable with plug. Speed control as option.

PERFORMANCE CURVE N-180

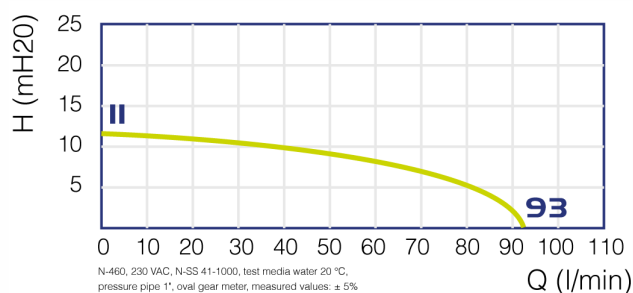

OPERATING DATA

Flow rate up to 93 l/min

Head up to 11 m

Viscosity up to 600 mPas

Density up to 1,5

N-180

Version

Voltage

Code



with LVR

230 V 1~,50/60 Hz, 640 W

1180 2301

with LVR + SC

230 V 1~,50/60 Hz, 640 W

1180 2303


LVR: Low voltage release SC: Speed control

N-280

230 Volt, 50/60 Hz, 825 Watt, IP 24,

230 Volt, 50/60 Hz, 825 Watt, IP 24, double insulation protection class II, over load protection switch with integrated low voltage release. 5 m cable with plug. Speed control as option.

PERFORMANCE CURVE N-280

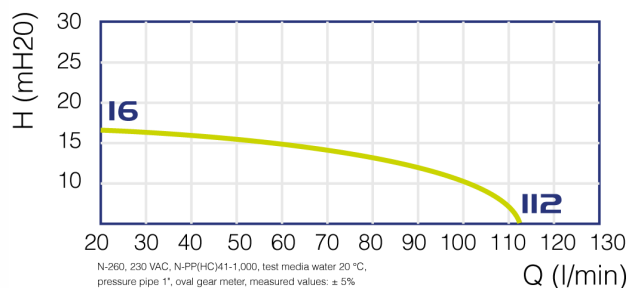

OPERATING DATA

Flow rate up to 112 l/min

Head up to 16 m

Viscosity up to 1,000 mPas

Density up to 1,9

N-280

Version

Voltage

Code



with LVR

230 V 1~,50/60 Hz, 825 W

1280 2301

with LVR + SC

230 V 1~,50/60 Hz, 825 W

1280 2303

LVR: Low voltage release SC: Speed control



CASPANI NUOVE TECNOLOGIE

Montano Lucino CO - Via dell'Industria 3a

Tel 031/471714 Fax 031/470351

www.cntcaspani.com