

N-AIR 1 & N-460

ENG


N-AIR 1

300 Watt at max 6 bar operating pressure, IBEX U05 ATEX B007 X



300 Watt at max 6 bar operating pressure, with silencer and a brass ball valve for control compressed air. This regulates speed of the motor and varies pumping capacity.

PERFORMANCE CURVE N-AIR 1

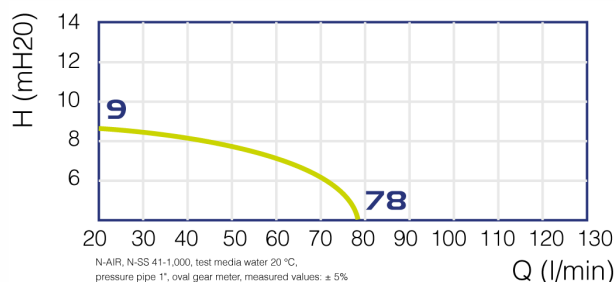

OPERATING DATA

Flow rate up to 78 l/min

Head up to 9 m

Viscosity up to 400 mPas

Density up to 1,3



IBEX U05 ATEX B007 X

N-AIR 1

Voltage

Code



300 Watt at max. 6 bar
operating pressure
Air consumption under load 13 l/sec.

3001 0300


N-460

230 Volt, 50/60 Hz, 640 Watt, IP 55, II 2G Ex db IIC T6 Gb



230 Volt, 50/60 Hz, 640 Watt, protection class II 2G Ex db IIC T6 Gb, IP 55, with integrated low voltage release, 5 m cable without plug. Optional with Ex-plug.

PERFORMANCE CURVE N-280

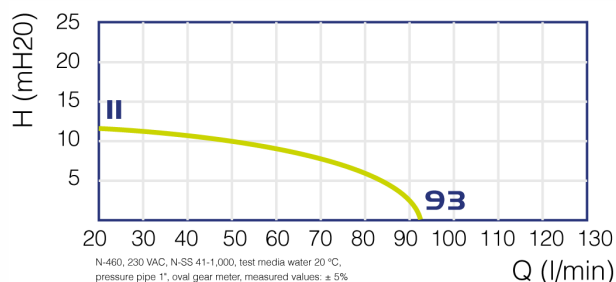

OPERATING DATA

Flow rate up to 93 l/min

Head up to 11m

Viscosity up to 600 mPas

Density up to 1,5



II 2G Ex db IIC T6 Gb

N-460

Version

Voltage

Code



with LVR

230 V 1~, 50/60 Hz, 640 W

1460 2301

LVR: Low voltage release



CASPANI NUOVE TECNOLOGIE

Montano Lucino CO - Via dell'Industria 3a

Tel 031/471714 Fax 031/470351

www.cntcaspani.com